

# StarFix<sup>®</sup>

## Masonry Fixing



- ▶ **No Plug Required**
- ▶ **High Strength Stress Free**
- ▶ **50% Quicker Assembly**
- ▶ **30% Less Drive-in Torque Required**

### High Tech Fixing

The award winning **StarFix** masonry fixing screw that threads directly into pre-drilled pilot holes - no anchor or plug is needed. Patented StarForm™ self tapping thread with spaced hi-lo thread form provides ultimate grip and allows for multiple re-fixing without stripping the formed tapped hole.

- ▶ No plug required – Cost effective and simple
- ▶ Only 6mm or 6.5mm pilot hole required through frame, reinforcement and brickwork
- ▶ Universal for all common applications
- ▶ Long lasting and stress free stand-off fixing

### Safe

The precision StarDrive T30 recess provides optimum drive efficiency, improving grip and extending bit life.

### Secure

High thread cuts into masonry whilst the low thread compacts loose material. This gives better resistance to the fixing pulling out of the masonry base due to more effective thread engagement.

### Faster & No Wastage

No need for a plug means a quicker application. **StarFix** masonry anchors eliminate the wastage associated with nylon installation fixings.



[www.rapierstar.com](http://www.rapierstar.com)

## Lower Torque

The highly efficient StarForm™ thread lowers torque and achieves optimum insertion into all kinds of brick, stone, concrete and wood.

## Extensive Range

Nine size variations from 62mm to 202mm ensure there is a StarFix masonry anchor available for all applications.

## Safe and Strong



Safer, stronger installations with a 7.5mm diameter steel fixing.

Concrete    Solid Brick    Sand-Lime Brick    Pumice Stone    Light Concrete    Honeycomb Brick

mm  
10  
20  
30  
40  
50  
60  
70



Suggested minimum screw-in depths

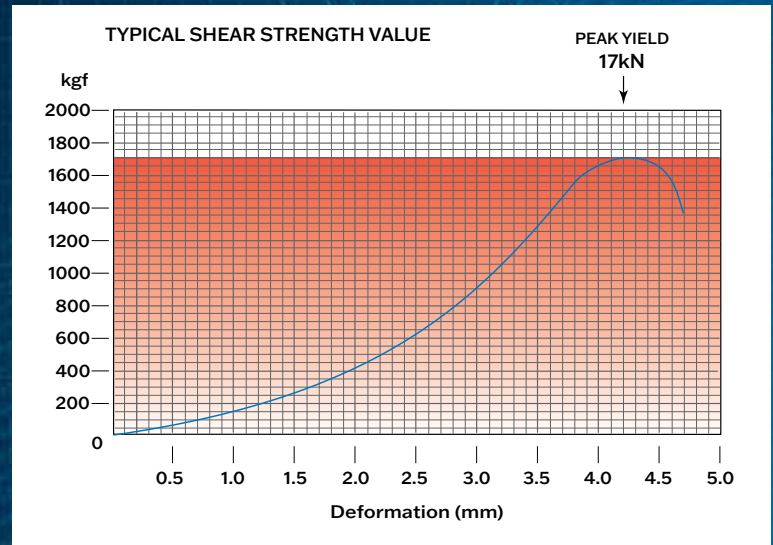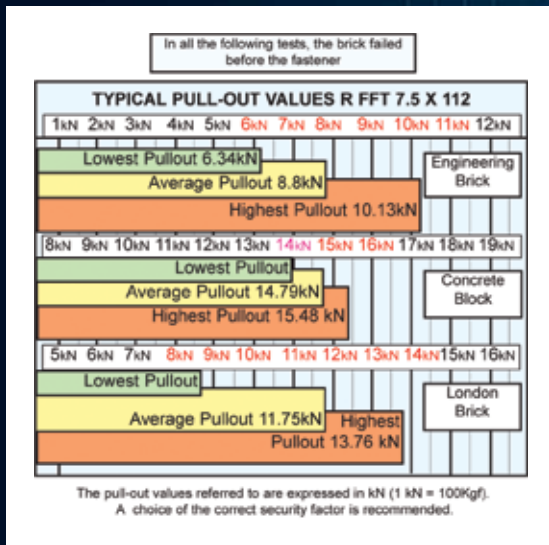

\* Average pull out figures are typical values and ultimate pull out will be dependant on the condition of the material. It is recommended that any user establish the nature and condition of any substrate prior to usage.

**Rapier StarFix**

		LENGTH								
		62	82	102	112	122	142	152	182	202
DIAMETER	7.5mm	●	●	●	●	●	●	●	●	●

Yellow passivated finish – 6/6.5mm pilot hole required

SCAN QR CODE WITH

FOR RAPIERSTAR



YOUR SMART DEVICE

## Accessories



### Cover Caps

Flush fitting against the frame – White or Black available.

### SDS Drill Bits

Full range of SDS drill bits available upon request.



Rapierstar Ltd.  
Star Business Park  
Macclesfield, Cheshire  
SK11 9JA. United Kingdom

**T** +44(0)1260 223311  
**F** +44(0)1260 223399  
**E** info@rapierstar.com

[www.rapierstar.com](http://www.rapierstar.com)